

AUTOFILL SPECIFICATIONS

Features

Computer control of output speeds and mix ratios

OEM quality fill compared to present chunking methods


Reduced labor compared to present chunking methods

Higher, more consistent profit margins compared to present chunking methods

Quiet, high volume operation

Consistent fill ratios and delivery speeds

5 minute cleaning time

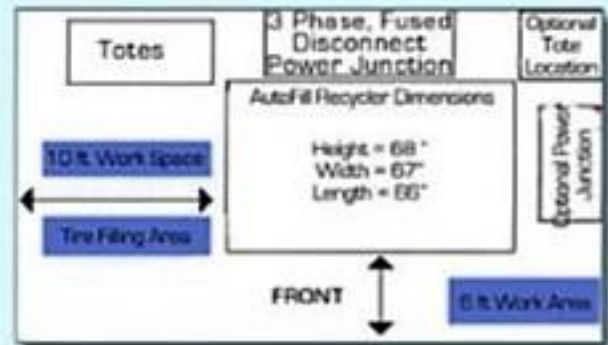

Model 2440b

Fill ratios and deliveries

Virgin Only @ 4 & 11 lbs/min

40% Recycled @ 10 & 18 lbs/min

55% Recycled @ 10 & 28 lbs/min

65% Recycled @ 10 & 28 lbs/min

Manual pressure measurement
Manual leaning of mix ration
for tire pressurization

Manual reset if there is a
machine error

Power Options

208/230 Volt 3 wire, 3 phase, 60 Hz, 100 amp service

440/480 Volt 3 wire, 3 phase, 60 Hz, 50 amp service

380 Volt 3 wire, 3 phase, 50 Hz, 50 amp service

Note: neutral is not required for any of the options